



TPS-107S(36) 30W Poly Crystalline Solar Module

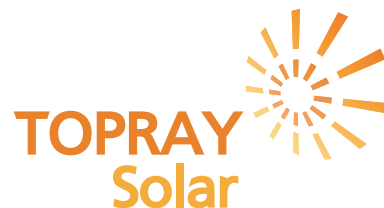

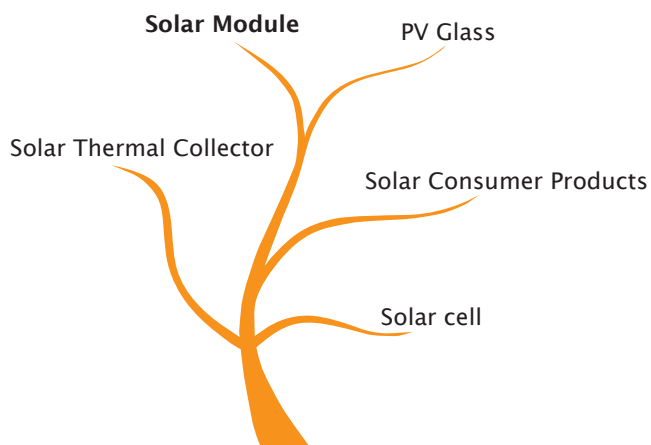


Not Your Average Solar Provider

Our Products Categories



Professional Solar Provider Since 1992


Key Feature

-  Plus power tolerance: $\pm 5\%$
-  Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust
-  Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity

Best Quality

- Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"
- 100%EL double-inspection ensures modules are defects free

Electrical Characteristics

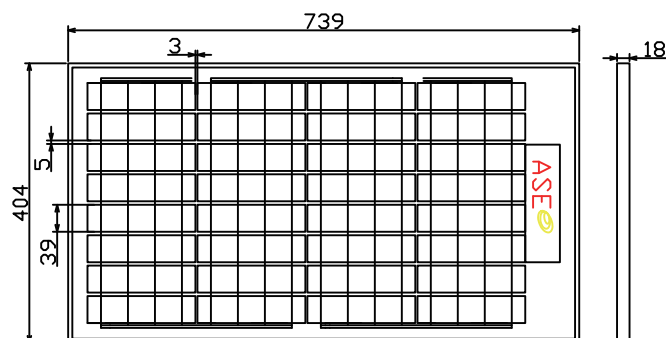

MECHANICAL SPECIFICATION

Cell Type	Poly crystalline 156×156mm
Number of cells	36pcs
Dimensions(A×B×C)	739×404×18mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	Battery Clamp
Output Cables	Length 1m

PERFORMANCE AT STANDARD TEST CONDITION (STC:1000W/m²,25°C,AM1.5)

Module Series	TPS-107S(36)-30W
Maximum Power at STC(Pmax)	30W
Short Circuit Current(Isc)	2.03A
Open Circuit Voltage(Voc)	21.6V
Maximum Power Current(Imp)	1.7A
Maximum Power Voltage(Vmp)	17.6V

ABSOLUTE MAXIMUM LIMITS

Parameters	Unit	Rating
Operation temperature	°C	-40 to +85
Storage temperature	°C	-40 to +85

DEALER INFORMATION BOX